

How to Upgrade the Router Firmware and Module Firmware over the Web GUI?

Steps

Router Firmware


1. Log in the LTE5398-M904 as “admin”.
2. Go to Firmware Upgrade (Maintenance > Firmware Upgrade > Upgrade Firmware). Specify the router firmware file. Upgrade the file.



OR

Online Firmware Upgrade>Check for Latest Firmware Now

(in this example, it upgrades from V1.00(ABQV.3)C0>>> V1.00(ABQV.4)C0)

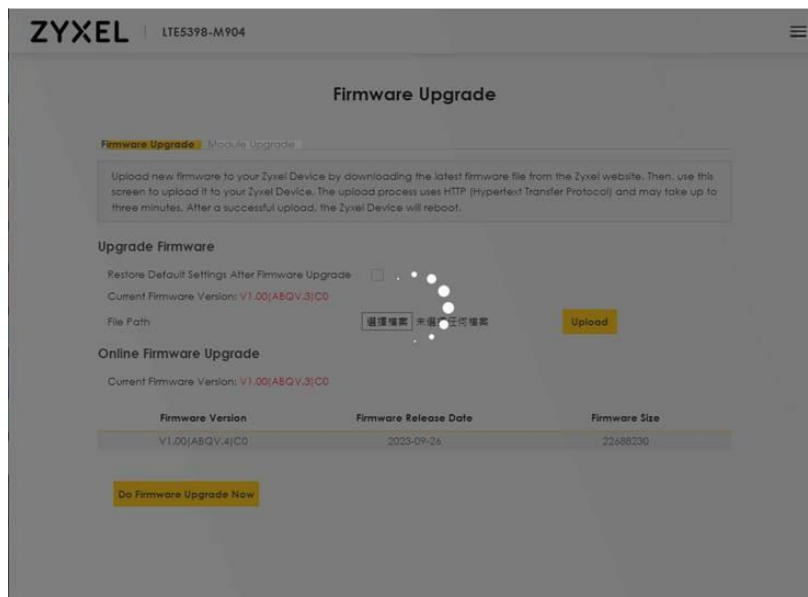

Module Firmware

3. Go to Module Upgrade (Maintenance > Firmware Upgrade > Module Upgrade).

- Check the current firmware version(EG18EAPAR01A08M4G before update)
 - Select the correct file for updating(Update_EG18EAPAR01A08M4G-R01A12M4G.zip)
 - Click button [Upload] to start to update
 - process take around 20 mins, PLEASE DO NOT interrupt during the process and make sure the power is stable while it is updating.
- It will automatically be redirected to login page after finishing updating.

The screenshot shows the XEL LTE5398-M904 Firmware Upgrade interface. The page title is "Firmware Upgrade". Below the title, there are two tabs: "Firmware Upgrade" and "Module Upgrade", with "Module Upgrade" being the active tab. A warning box states: "Upload module firmware into the device. Do not poweroff the device during upgrade. The upload process uses HTTP (Hypertext Transfer Protocol) and may take up to three minutes." Below this, the "DFOTA Upgrade" section shows the "Current LTE Module Version: EG18EAPAR01A08M4G" and a red notice: "Notice! DFOTA upgrade may take up to 20 minutes!". At the bottom, there is a "File Path" field with a "選擇檔案" (Choose File) button, a status "未選擇任何檔案" (No file selected), and a yellow "Upload" button.

4. After upgrade

- Check the current firmware version should be EG18EAPAR01A12M4G

The screenshot shows the XEL LTE5398-M904 Firmware Upgrade interface after the update. The page title is "Firmware Upgrade". Below the title, there are two tabs: "Firmware Upgrade" and "Module Upgrade", with "Module Upgrade" being the active tab. A warning box states: "Upload module firmware into the device. Do not poweroff the device during upgrade. The upload process uses HTTP (Hypertext Transfer Protocol) and may take up to three minutes." Below this, the "DFOTA Upgrade" section shows the "Current LTE Module Version: EG18EAPAR01A12M4G" and a red notice: "Notice! DFOTA upgrade may take up to 20 minutes!". At the bottom, there is a "File Path" field with a "選擇檔案" (Choose File) button, a status "未選擇任何檔案" (No file selected), and a yellow "Upload" button.